

INCLUDES

- Combination valve

UNIQUE FEATURES

- Direct venting to specified location

REASONS TO CHOOSE

- Proven performance
- Long-lasting durability
- Alternate venting option
- Provides baffled vent
- Air management options
- For use on plastic or metal reservoirs



FOR MORE INFORMATION, CALL A KELCH
REPRESENTATIVE TODAY AT **877.944.5699**

KELCH.COM



COMPOSITION

- Engineered thermoplastics

VENTING OPTIONS

- Open vent
- Combination valve

MOUNTING

- Push-in grommet
- Request Kelch print #6637 for recommended hole size and wall thickness specification

MATERIAL OPTIONS

- Nylon 6
- Flame Retardant


GROMMET OPTIONS (SOLD SEPARATELY)

- Nitrile - pt. #203403
- FKM - pt. #203535

BARB OPTIONS

- $\frac{3}{16}$ " barb
- $\frac{1}{4}$ " barb
- $\frac{5}{16}$ " barb

CROSS SECTION VIEW

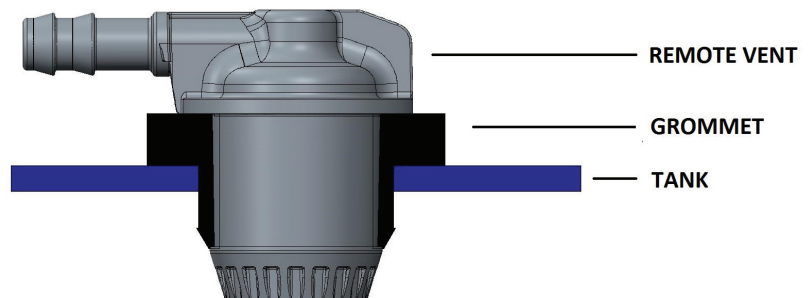

Revised 4/24

Disclaimer: At Kelch, we make quality products. We do not know how you will use our product. You, the customer, are in the best position to know the uses and conditions to which our products will be subjected.

You are responsible for identifying and performing tests necessary to assure that our product is safe and suitable for the application you have chosen. You are in the best position to know how our product will perform in your application, we ask that you hold us harmless from any claims that result from our product being used in an unsafe or unsuitable way.

FOR MORE INFORMATION, CALL A KELCH REPRESENTATIVE TODAY AT 877.944.5699

KELCH.COM